


CSI COMPATIBLE DATA COLLECTOR CORDSETS

CSI 2110, 2115, 2120

Example Cordset: CB104-C3-010-D2C



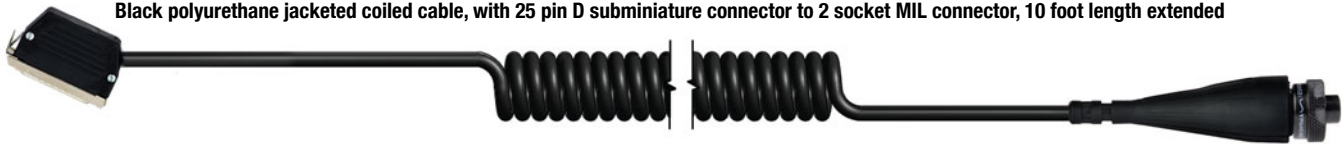









Black polyurethane jacketed coiled cable, with 25 pin D subminiature connector to 2 socket MIL connector, 10 foot length extended



Example Cordset: CB103-C3-005-D2C-SF

Black polyurethane jacketed cable, with 25 pin D subminiature connector to 2 socket MIL connector, with safety connector, 5 foot length



| Cable Type (see Cables data sheet) | Connector Part Number (see Factory Installed Connectors data sheet) | Cable Length (three digit format) | Terminating Connector Part Number (see Factory Installed Connectors data sheet) | Safety Connector (see page 65 for Safety Connector information) |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <p>CB103</p>  <p>Black Polyurethane 2 Conductor Braided Shield with Drain Wire 250°F (121°C) .245 in (6 mm) AWG=20</p> <p>CB104</p>  <p>Black Polyurethane, Coiled 2 Conductor Braided Shield 250°F (121°C) .210 in (5 mm) AWG = 22</p> <p>CB108</p>  <p>Black Polyurethane, Light weight, Coiled 2 Conductor Braided Shield 250°F (121°C) .170 in (4 mm) AWG = 24</p> <p>CB110</p>  <p>Black Polyurethane, Light weight, 2 Conductor Braided Shield with Drain Wire 250°F (121°C) .175 in (4 mm) AWG = 20</p> | <p>C3</p>  <p>25 pin D Subminiature Connector, CSI Acceleration Input Portable Measurements</p> | <p>Select Cable Length Based on Three Digit Numbering System</p> <p>Example Numbering:</p> <p>001 = 1 ft. (,30 m) 005 = 5 ft. (1,52 m) 010 = 10 ft. (3,05 m) 015 = 15 ft. (4,57 m) 025 = 25 ft. (7,62 m) 050 = 50 ft. (15,24 m) 100 = 100 ft. (30,48 m)</p> <p>Straight Cables Available in Custom Lengths</p> <hr/> <p>Coiled Cables Available in the Following Lengths Only:</p> <p>006 = 6 ft. (1,83 m) 010 = 10 ft. (3,05 m) 016 = 16 ft. (4,88 m)</p> | <p>D2C</p>  <p>2 socket MIL connector Portable Measurements</p> <p>E</p>  <p>BNC Jack Connector Portable Measurements, Permanent Mount</p> <p>F</p>  <p>BNC plug connector Portable Measurements, Permanent Mount</p> <p>J2C</p>  <p>2 Socket mini-MIL Connector Portable Measurements</p> <p>K2C</p>  <p>2 Socket MIL Connector Portable Measurements</p> <p>R2C</p>  <p>2 Pin MIL Connector Portable Measurements, Permanent Mount</p> | <p>SF</p>  <p>Break-Away Safety Connector</p> |

Backed by our Unconditional Lifetime Warranty

www.ctconline.com



CSI COMPATIBLE DATA COLLECTOR CORDSETS

CSI 2130

Example Cordset: CB108-C76-010-D2C














Light weight, black polyurethane jacketed coiled cable, with 5 pin M12 connector to 2 socket MIL connector, 10 foot length extended



Example Cordset: CB110-C76-005-D2C-SF

Light weight, black polyurethane jacketed cable, with 5 pin M12 connector to 2 socket MIL connector, with safety connector, 5 foot length



| Cable Type (see Cables data sheet) | Connector Part Number (see Factory Installed Connectors data sheet) | Cable Length (three digit format) | Terminating Connector Part Number (see Factory Installed Connectors data sheet) | Safety Connector (see page 65 for Safety Connector information) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <p>CB103</p>  <p>Black Polyurethane 2 Conductor Braided Shield with Drain Wire 250°F (121°C) .245 in (6 mm) AWG=20</p> | <p>C76</p>  <p>5 pin M12 Circular Connector Portable Measurements</p> | <p>Select Cable Length Based on Three Digit Numbering System</p> <p>Example Numbering:</p> <p>001 = 1 ft. (.30 m) 005 = 5 ft. (1.52 m) 010 = 10 ft. (3.05 m) 015 = 15 ft. (4.57 m) 025 = 25 ft. (7.62 m) 050 = 50 ft. (15.24 m) 100 = 100 ft. (30.48 m)</p> | <p>D2C</p>  <p>2 socket MIL connector Portable Measurements</p> | <p>SF</p>  <p>Break-Away Safety Connector</p> |
| <p>CB104</p>  <p>Black Polyurethane, Coiled 2 Conductor Braided Shield 250°F (121°C) .210 in (5 mm) AWG = 22</p> | <p>C3</p>  <p>25 pin D Subminiature Connector, CSI Acceleration Input Portable Measurements</p> | <p>Straight Cables Available in Custom Lengths</p> | <p>E</p>  <p>BNC Jack Connector Portable Measurements, Permanent Mount</p> | |
| <p>CB108</p>  <p>Black Polyurethane, Light weight, Coiled 2 Conductor Braided Shield 250°F (121°C) .170 in (4 mm) AWG = 24</p> | | <p>Coiled Cables Available in the Following Lengths Only:</p> <p>006 = 6 ft. (1.83 m) 010 = 10 ft. (3.05 m) 016 = 16 ft. (4.88 m)</p> | <p>F</p>  <p>BNC plug connector Portable Measurements, Permanent Mount</p> | |
| <p>CB110</p>  <p>Black Polyurethane, Light weight, 2 Conductor Braided Shield with Drain Wire 250°F (121°C) .175 in (4 mm) AWG = 20</p> | | | <p>J2C</p>  <p>2 Socket mini-MIL Connector Portable Measurements</p> | |
| | | | <p>K2C</p>  <p>2 Socket MIL Connector Portable Measurements</p> | |
| | | | <p>R2C</p>  <p>2 Pin MIL Connector Portable Measurements, Permanent Mount</p> | |




CSI COMPATIBLE DATA COLLECTOR CORDSETS

CSI 2120 TRIAXIAL

Example Cordset: CB117-C50-010-J4C



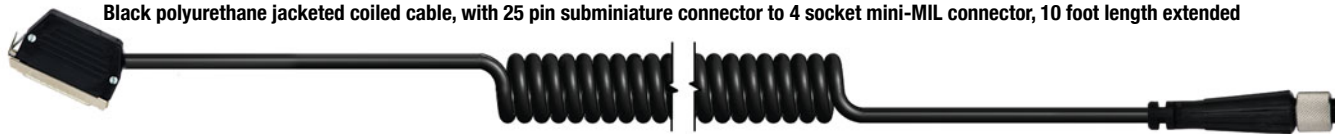





Black polyurethane jacketed coiled cable, with 25 pin subminiature connector to 4 socket mini-MIL connector, 10 foot length extended



Example Cordset: CB105-C50-005-J4C-SFT

Black polyurethane jacketed cable, with 25 pin subminiature connector to 4 socket mini-MIL connector, with safety connector, 5 foot length



| Cable Type (see Cables data sheet) | Connector Part Number (see Factory Installed Connectors data sheet) | Cable Length (three digit format) | Terminating Connector Part Number (see Factory Installed Connectors data sheet) | Safety Connector (see page 65 for Safety Connector information) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <p>CB105</p>  <p>Black Polyurethane 4 Conductor Braided Shield with Drain Wire 250°F (121°C) .250 in (6 mm) AWG = 20</p> <p>CB117</p>  <p>Black Polyurethane, coiled 4 Conductor Braided Shield 250°F (121°C) .210 in (5 mm) AWG = 25</p> | <p>C50</p>  <p>25 pin D Subminiature Connector, CSI Acceleration Input Portable Measurements</p> | <p>Select Cable Length Based on Three Digit Numbering System</p> <p>Example Numbering:</p> <p>001 = 1 ft. (,30 m) 005 = 5 ft. (1,52 m) 010 = 10 ft. (3,05 m) 015 = 15 ft. (4,57 m) 025 = 25 ft. (7,62 m) 050 = 50 ft. (15,24 m) 100 = 100 ft. (30,48 m)</p> <p>Straight Cables Available in Custom Lengths</p> <hr/> <p>Coiled Cables Available in the Following Lengths Only:</p> <p>006 = 6 ft. (1,83 m) 010 = 10 ft. (3,05 m) 016 = 16 ft. (4,88 m)</p> | <p>E3C</p>  <p>3 BNC jacks to 1 multi-conductor cable Portable Measurements</p> <p>F3C</p>  <p>3 BNC plugs to 1 multi-conductor cable Portable Measurements</p> <p>G4H1</p>  <p>4 Socket, Twist Lock Connector Portable Measurements, Permanent Mount</p> <p>J4C</p>  <p>4 socket mini-MIL connector Portable Measurements</p> | <p>SFT</p>  <p>Break-Away Safety Connector</p> |

Backed by our Unconditional Lifetime Warranty

www.ctconline.com



CSI COMPATIBLE DATA COLLECTOR CORDSETS

CSI 2130 TRIAXIAL

Example Cordset: CB117-C320-010-J4C

Black polyurethane jacketed coiled cable, with 5 pin M12 circular connector to 4 socket mini-MIL connector, 10 foot length extended



Example Cordset: CB105-C320-005-J4C-SFT

Black polyurethane jacketed cable, with 5 pin M12 circular connector to 4 socket mini-MIL connector, with safety connector, 5 foot length



Cable Type
(see *Cables* data sheet)

Connector Part Number
(see *Factory Installed Connectors* data sheet)

Cable Length
(three digit format)

Terminating Connector Part Number
(see *Factory Installed Connectors* data sheet)

Safety Connector
(see *page 65* for Safety Connector information)

CB105



Black Polyurethane
4 Conductor
Braided Shield with Drain Wire
250°F (121°C)
.250 in (6 mm)
AWG = 20

CB117



Black Polyurethane, coiled
4 Conductor
Braided Shield
250°F (121°C)
.210 in (5 mm)
AWG = 25

C320



5 Pin M12 Circular Connector
Portable Measurements
Ch. 1 = Y
Ch. 2 = X
Ch. 3 = Z

C419



5 Pin M12 Circular Connector
Portable Measurements
Ch. 1 = X
Ch. 2 = Y
Ch. 3 = Z

C420



5 Pin M12 Circular Connector
Portable Measurements
Ch. 1 = Z
Ch. 2 = X
Ch. 3 = Y

C445



25 pin D Subminiature Connector,
wired for CSI 2130 Triaxial
Portable Measurements

Select Cable Length
Based on Three Digit
Numbering System

Example
Numbering:

001 = 1 ft. (,30 m)
005 = 5 ft. (1,52 m)
010 = 10 ft. (3,05 m)
015 = 15 ft. (4,57 m)
025 = 25 ft. (7,62 m)
050 = 50 ft. (15,24 m)
100 = 100 ft. (30,48 m)

Straight Cables Available
in Custom Lengths

Coiled Cables Available
in the Following Lengths
Only:

006 = 6 ft. (1,83 m)
010 = 10 ft. (3,05 m)
016 = 16 ft. (4,88 m)

E3C



3 BNC jacks to 1 multi-conductor cable
Portable Measurements

F3C



3 BNC plugs to 1 multi-conductor cable
Portable Measurements

G4H1



4 Socket, Twist Lock Connector
Portable Measurements,
Permanent Mount

J4C



4 socket mini-MIL connector
Portable Measurements

SFT



Break-Away Safety Connector

